


Motion detector

MotionSwitch LED Z-Wave



EAN 4007841 035402
Article number 035402

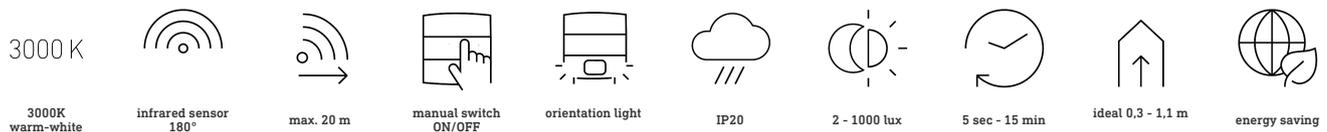

Function description

Smart home via power socket. No cable. No batteries. No stress. The MotionSwitch LED Z-Wave is a motion detector, brightness sensor, button and orientation light in one. Above all, it is easy to integrate and operate: plug into the power socket, install via the Smart Friends app and control indoor lights, roller-shutter motors, sound systems, alarm systems etc. easily and conveniently.

Technical specifications

Type	Motion detectors	Twilight setting	2 – 2000 lx
Dimensions (L x W x H)	56 x 55 x 55 mm	Time setting	5 s – 15 Min.
Mains power supply	230 – 240 V / 50 Hz	Output	1,5 W
Power consumption	0,3 W	Constant-lighting control	No
Sensor Technology	passive infrared	Basic light level function	Yes
Application, place	Indoors	Functions	Sensor channel, Orientation light
Installation site	wall	Settings via	Z-Wave, Potentiometers
Installation	Other	With remote control	No
Mounting height	0,20 – 1,10 m	Interconnection	Yes
Reach, radial	r = 4 m (25 m ²)	IP-rating	IP20
Reach, tangential	r = 20 m (628 m ²)	Material	Plastic
Detection angle	180 °	Ambient temperature	-10 – 35 °C
Angle of aperture	90 °	Application, room	function room / ancillary room, WC / washroom, Indoors
Optimum mounting height	1,1 m	Colour	white
Mechanical scalability	No	Colour, RAL	9010
Sneak-by guard	Yes	IDs, certificates	VDE
Capability of masking out individual segments	No	Manufacturer's Warranty	3 years
Electronic scalability	No	PU1, EAN	4007841035402
Twilight setting TEACH	No		

Motion detector

MotionSwitch LED Z-Wave



EAN 4007841 035402
Article number 035402

Accessories

EAN 4007841 029876 Smartfriends Box

Dimension Drawing

